
Клиент
Дата 12.11.2019
Проект
Ссылка
№ предложения

Stefani S.p.A.
Via del Lavoro, 9
Castegnero (VI) - ITALY
Tel. +39 0444 639 999
Fax. +39 0444 638 240

Перегрев
Модель 1 x BOREA E 50-1 G 7,5 E 4D

Мощность	12,8	kW	Хладагент		R404A	
Температура воздуха на входе	0,0	°C	Температура кипения	Dew	-8,0	°C
Температура воздуха на выходе	-3,8	°C	Перегрев		5	K
Relative Humidity In	85	%	Температура конденсации	Dew	40,0	°C
Relative Humidity Out	98	%	Переохлаждение		0	K
Q.ty of condensed water	4,3	kg/h				
Высота	0	m				
Поток воздуха	7150	m³/h	частота вращения		100	%
Поток воздуха	30,3	m	Скорость вращения вентилятора		1390	1/min
Количество вентиляторов	1		Звуковая мощность		75	dB(A)
Диаметр вентилятора	500	mm	Уровень давления шума	ISO 3744	49	dB(A) at 5 m
Напряжение	400	V	потребляемая мощность		720	W
Частота	50	Hz	Номинальная мощность		720	W
Потребление тока	Три фазы		Номинальный ток (*)		1,41	A
Давление	0	Pa				
Поверхность	34,8	m²	Трубы		Медь	
Внутренний объем	11,4	dm³	Ребра		Аллюминий	
Шаг ребра	7,5	mm	Корпус		Аллюминий/Гальванизированная окрашенная ст	
Вес	78	kg	Длина		1380	mm
Соединения Входа	22 mm		Высота		808	mm
Соединения Выхода	42 mm		Ширина		626	mm
			PS		30	bar

Оттайка	Электрический	1x0,7+5x0,7=4,2 kW

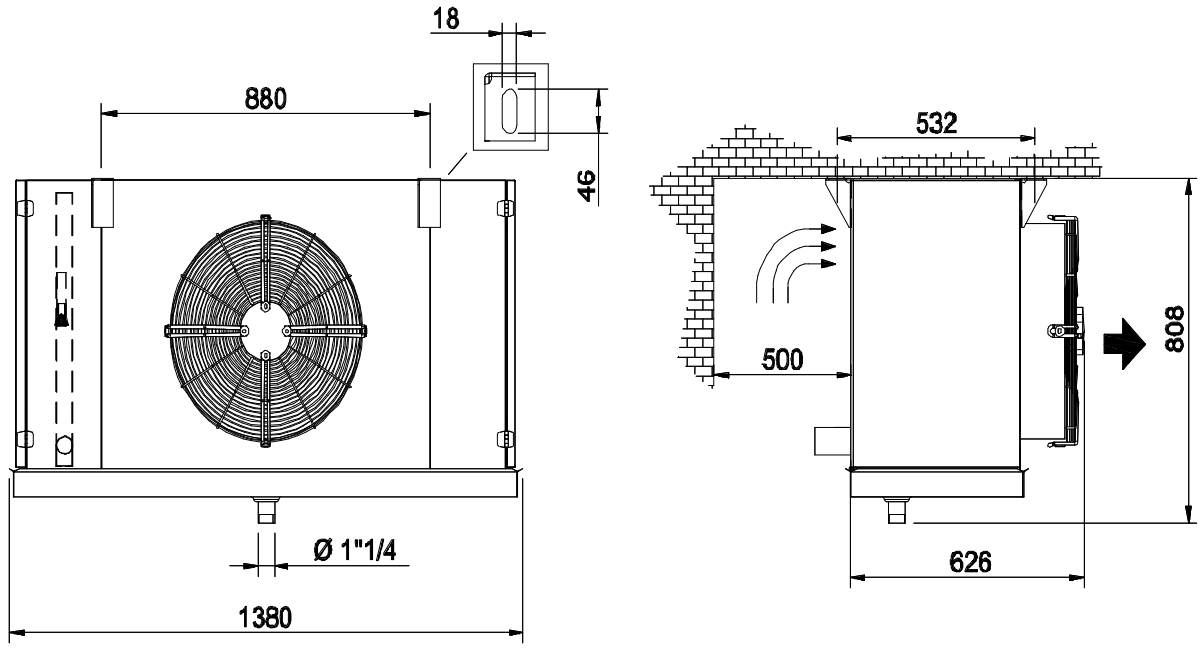

(*) ERP COMPLIANT Потребление тока может менятся в зависимости от температуры воздуха

MasterUnits 2016 - v. 190621
BE3FC76EF0AC499690000000007F66695099

Комментарии

Клиент
Телефон
Факс
Адрес электронной почты
Дата 12.11.2019
Проект
Ссылка
№ предложения

Stefani S.p.A.
Via del Lavoro, 9
Castegnero (VI) - ITALY
Tel. +39 0444 639 999
Fax. +39 0444 638 240

Перегрев

Модель 1 x BOREA E 50-1 G 7,5 E 4D

SALES NOTE:

In case of order is required the signature for the acceptance and approval of Sales conditions

Warranty of resistance to corrosion are excluded if not specified

Datasheet does not indicate weights and dimensions valid for transport: weights and dimensions are not valid for installation purpose and for all the possible combination of options configuration.

As technical agreement, for all of units with horizontal air flow, it is defined right side connection when air flow direction with reference to front view of the unit is coming out of the paper drawing and connections are on the left side, otherwise it is defined left if the air flow direction with reference to front view of the unit is entering the paper drawing.

Units are equipped with fans compliant to directive ERP 2009-125-EC

Units operating with liquid are not full self-draining: antifreeze concentration must be made according minimum reachable temperature in installation site.

According to EN13487 Sound pressure level declared is calculated in free field operation above a reflecting surface (Source factor Q=2). According to ISO3744, in case of measurement if difference in the Sound pressure level when unit is on and off is lower than 6dB, the measurement itself is not considered accurate. Sound pressure level tolerance declared is +2dBA.

Electric Defrost
Electric defrost consists of special AISI 304 heaters housed internally of specifics holes in the finned coil pack : number is variable depending on type of unit model. As well commercial units have 1 heater in the drain pan while in industrial ones heaters are 2. All heaters have a 230/ single phase nominal power voltage but factory wiring predisposition is for (star connection) 400V/ 3 phase excluded little commercial units . During design /installation it is necessary to check minimum distances from wall to be sure that heaters are replaceable. Terminal box wired is placed in the technical space opposite to the connection side. Special unit at 460V-60Hz must have special heaters please contatc STEFANI SALE OFFICE.