




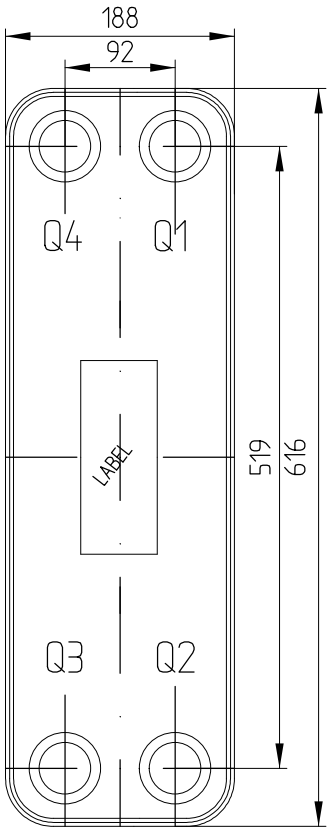

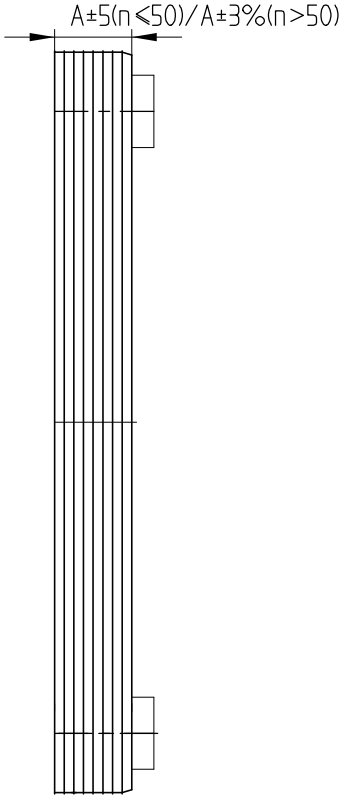

ID	RIDAN Code	Drawing No.	Model	Plates(n)	A	WEIGHT	VOLUME
1	004B1920R	2306057-01	95BR	30	95	15.44Kg	Q1Q2:3.75L/Q3Q4:3.5L
2	004B1921R	2306057-02	95BR	36	112	17.62Kg	Q1Q2:4.5L/Q3Q4:4.25L
3	004B1922R	2306057-03	95BR	40	123	19.08Kg	Q1Q2:5.0L/Q3Q4:4.75L
4	004B1923R	2306057-04	95BR	50	152	22.72Kg	Q1Q2:6.25L/Q3Q4:6.0L
5	004B1932R	2306057-05	95BR	60	180	26.36Kg	Q1Q2:7.5L/Q3Q4:7.25L
6	004B1933R	2306057-06	95BR	70	208	30Kg	Q1Q2:8.75L/Q3Q4:8.5L
7	004B1934R	2306057-07	95BR	80	236	33.64Kg	Q1Q2:10.0L/Q3Q4:9.75L
8	004B1936R	2306057-08	95BR	90	264	37.28Kg	Q1Q2:11.25L/Q3Q4:11.0L
9	004B1937R	2306057-09	95BR	100	292	40.92Kg	Q1Q2:12.5L/Q3Q4:12.25L
10	004B1938R	2306057-10	95BR	110	320	44.56Kg	Q1Q2:13.75L/Q3Q4:13.5L
11	004B1939R	2306057-11	95BR	120	348	48.2Kg	Q1Q2:15.0L/Q3Q4:14.75L
12	004B1940R	2306057-12	95BR	140	404	55.48Kg	Q1Q2:17.5L/Q3Q4:17.25L
13	004B1941R	2306057-13	95BR	160	461	62.76Kg	Q1Q2:20.0L/Q3Q4:19.75L
14	004B1942R	2306057-14	95BR	180	517	70.04Kg	Q1Q2:22.5L/Q3Q4:22.25L
15	004B1943R	2306057-15	95BR	200	573	77.32Kg	Q1Q2:25.0L/Q3Q4:24.75L

Q1-Q2-Q3-Q4
L2(W520)
Screw-Thread Connection



	DESIGN DATA
DESIGN PRESSURE	3.0MPa
TEST PRESSURE	4.5MPa
DESIGN TEMPERATURE	-196/+225
LEAKAGE TEST	Helium Test
PLATE MATERIAL	316L
PIPE MATERIAL	304
FRAME MATERIAL	304

Assembly drawing

DEPARTMENT	Sales	DATE	SCALE
DESIGNER	JLN	2022/05/31	
INSPECTOR	ZJF	2022/05/31	
APPROVAL	FL	2022/05/31	DRAWING NO.

ридан®

DESIGNATION XB-95BR-n-4G2

2306057 REV 0